


ST 7805

3-terminal 1 A positive voltage regulator

Features

- Output Current up to 1 A
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor Safe Operating Area Protection



1.Input 2.Common 3.Output

TO-220 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Parameter	Symbol	Value	Units
Input Voltage	V_I	35	V
Thermal Resistance Junction-Cases	$R_{\theta JC}$	5	$^\circ\text{C/W}$
Thermal Resistance Junction-Air	$R_{\theta JA}$	65	$^\circ\text{C/W}$
Operating Temperature Range	T_{Opr}	0 to + 125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 150	$^\circ\text{C}$

Electrical Characteristics

($0^\circ\text{C} < T_J < 125^\circ\text{C}$, $I_o = 500\text{ mA}$, $V_I = 10\text{ V}$, $C_I = 0.33\ \mu\text{F}$, $C_O = 0.1\ \mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage	V_O	$T_J = + 25^\circ\text{C}$	4.8	5	5.2	V	
		$5\text{ mA} \leq I_o \leq 1\text{ A}$, $P_o \leq 15\text{ W}$ $V_I = 7\text{ V to } 20\text{ V}$	4.75	5	5.25		
Line Regulation ¹⁾	Regline	$T_J = + 25^\circ\text{C}$	$V_I = 7\text{ V to } 25\text{ V}$	-	-	100	mV
			$V_I = 8\text{ V to } 12\text{ V}$	-	-	50	
Load Regulation ¹⁾	Regload	$T_J = + 25^\circ\text{C}$	$I_o = 5\text{ mA to } 1.5\text{ A}$	-	-	100	mV
			$I_o = 250\text{ mA to } 750\text{ mA}$	-	-	50	
Quiescent Current	I_Q	$T_J = + 25^\circ\text{C}$	-	-	8	mA	
Quiescent Current Change	ΔI_Q	$T_J = + 25^\circ\text{C}$	$I_o = 5\text{ mA to } 1\text{ A}$	-	-	0.5	mA
			$V_I = 7\text{ V to } 25\text{ V}$	-	-	1.3	
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_o = 5\text{ mA}$	-	-0.8	-	$\text{mV}/^\circ\text{C}$	
Output Noise Voltage	V_N	$f = 10\text{ Hz to } 100\text{ KHz}$, $T_A = + 25^\circ\text{C}$	-	42	-	μV	
Ripple Rejection	RR	$f = 120\text{ Hz}$, $V_I = 8\text{ V to } 18\text{ V}$	62	-	-	dB	
Dropout Voltage	V_{Drop}	$I_o = 1\text{ A}$, $T_J = + 25^\circ\text{C}$	-	2	-	V	
Output Resistance	R_O	$f = 1\text{ KHz}$	-	15	-	$\text{m}\Omega$	
Short Circuit Current	I_{SC}	$V_I = 35\text{ V}$, $T_A = + 25^\circ\text{C}$	-	230	-	mA	
Peak Current	I_{PK}	$T_J = + 25^\circ\text{C}$	-	2.2	-	A	

¹⁾ Load and line regulation are specified at constant junction temperature, Changes in V_o due to heating effects must be taken into account separately, Pulse testing with low duty is used.



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Typical Performance Characteristics

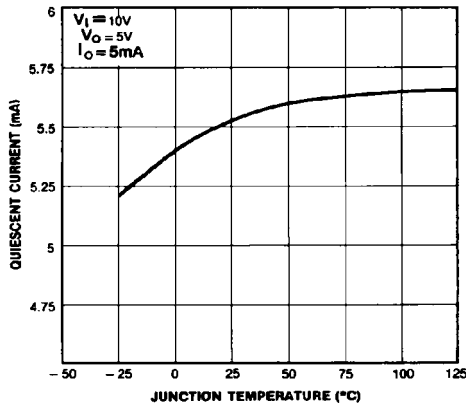


Figure 1. Quiescent Current

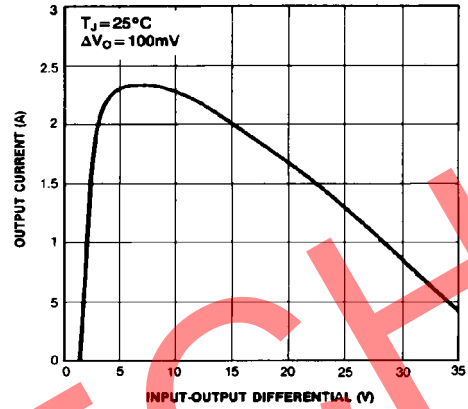


Figure 2. Peak Output Current

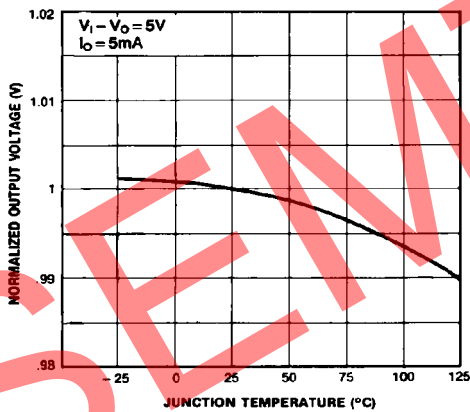


Figure 3. Output Voltage


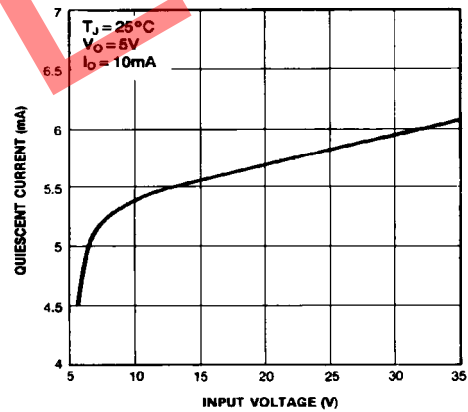



Figure 4. Quiescent Current




SEMTECH ELECTRONICS LTD.
 Subsidiary of Sino-Tech International (BVI) Limited



TO-220 PACKAGE OUTLINE

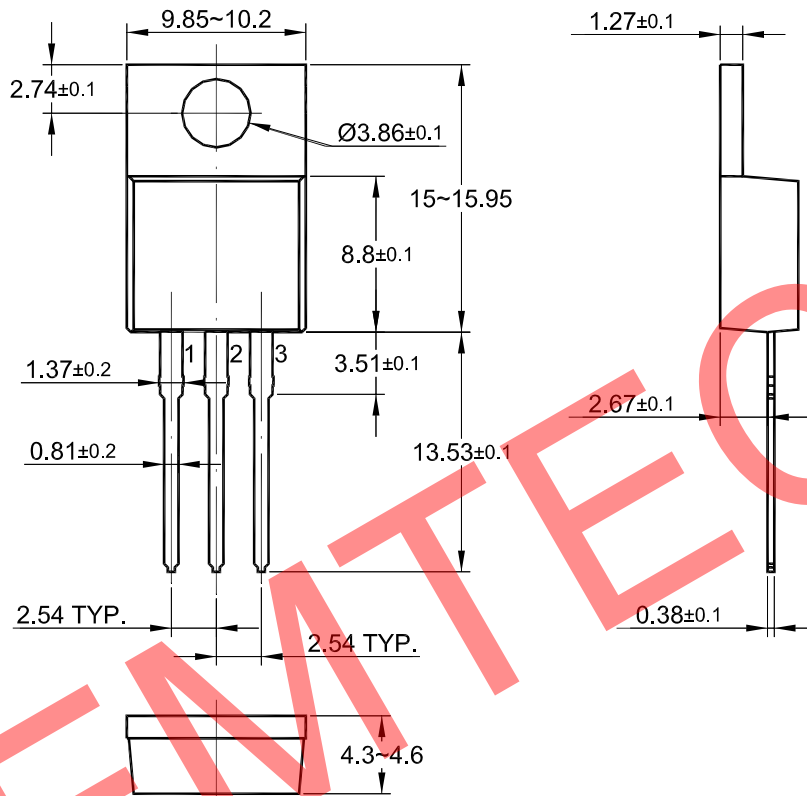

Dimensions in mm



SEMTECH ELECTRONICS LTD.
 Subsidiary of Sino-Tech International (BVI) Limited

