

http://www.ncepower.com

NCE25GD135P

1350V, 25A, Trench NPT IGBT

Features

- Trench NPT(Non Punch Through) IGBT
- High speed switching
- Low saturation voltage: V_{CE(sat)}=2.0V@I_C=25A
- High input impedance




Applications

- Inductive heating, Microwave oven, Inverter, UPS, etc.
- Soft switching applications

General Description

Using advanced Trench NPT technology, NCE's 1350V IGBTs offers superior conduction and switching performances, and easy parallel operation with exceptional avalanche ruggedness. This device is designed for soft switching applications.



Absolute Maximum Ratings

Symbol	Description	Ratings	Units
V _{CES}	Collector to Emitter Voltage	1350	V
V_{GES}	Gate to Emitter Voltage	+/-30	V
1	Continuous Collector Current @T _C =25°C	50	Α
I _C	Continuous Collector Current @T _C =100°C	25	Α
I _{CM} (1)	Pulsed Collector Current	90	Α
I _F	Diode Continuous Forward Current @T _C =100°C	25	
I _{FM}	Diode Maximum Forward Current	150	Α
В	Maximum Power Dissipation @T _C =25°C	312	W
P_D	Maximum Power Dissipation @T _C =100°C	125	W
T_J	Operating Junction Temperature	-55 to +150	°C
T _{stg}	Storage Temperature Range	-55 to +150	°C
	Maximum Lead Temp. for soldering Purposes, 1/8" from		
TL	case for 5seconds	300	°C

Notes:

^{1.} Repetitive rating, Pulse width limited by max. junction temperature



http://www.ncepower.com

Thermal Characteristics

Symbol	Parameter	Тур.	Max.	Units
R_{JC}	Thermal Resistance, Junction to Case	-	0.4	°C/W
R_{JA}	Thermal Resistance, Junction to Ambient	-	40	°C/W

Electrical Characteristics of the IGBT $\tau_{c=25^{\circ}\text{C}}$

$ \begin{array}{ c c c c c c c } \hline \textbf{Symbol} & \textbf{Parameter} & \textbf{Test Conditions} & \textbf{Min.} & \textbf{Typ.} \\ \hline \textbf{Off Characteristics} \\ \hline \textbf{BV}_{CES} & \textbf{Collector to Emitter} \\ \textbf{Breakdown Voltage} & \textbf{V}_{GE}=0V, \ Ic=1mA & 1350 & - \\ \hline \textbf{I}_{CES} & \textbf{Collector Cut-Off Current} & \textbf{V}_{CE}=1350V, \ V_{GE}=0V & - & - \\ \hline \textbf{I}_{GES} & \textbf{G-E Leakage Current} & \textbf{V}_{GE}=25V, \ V_{CE}=0V & - & - \\ \hline \textbf{On Characteristics} \\ \hline \textbf{V}_{GE(th)} & \textbf{G-E Threshold Voltage} & \textbf{I}_{C}=25mA, \ V_{CE}=V_{GE} & 4.0 & 5.5 \\ \hline \textbf{V}_{CE(sat)} & \textbf{Collector to Emitter Saturation} & \textbf{T}_{C}=25A, \ V_{GE}=15V & - & 2 \\ \hline \textbf{I}_{C}=25A, \ V_{GE}=15V & - & 2.15 \\ \hline \textbf{Dynamic Characteristics} \\ \hline \textbf{C}_{ies} & \textbf{Input Capacitance} & \textbf{V}_{CE}=30V, \ V_{GE}=0V, & - & 130 \\ \hline \textbf{C}_{res} & \textbf{Reverse Transfer} & \textbf{f=1MHz} & - & 80 \\ \hline \textbf{Switching Characteristics} \\ \hline \textbf{t}_{d(on)} & \textbf{Turn-On Delay Time} & - & 50 \\ \hline \end{array}$	_	T
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	_	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	-	V
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		V
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	1	mA
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	+/-250	nA
$V_{CE(sat)} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ T_{C} = 25^{\circ}C \end{bmatrix} - \begin{bmatrix} 2 \\ I_{C} = 25A, V_{GE} = 15V \\ T_{C} = 125^{\circ}C \end{bmatrix} - \begin{bmatrix} 2 \\ 2.15 \end{bmatrix}$ $Dynamic Characteristics$ $C_{ies} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ T_{C} = 125^{\circ}C \end{bmatrix} - \begin{bmatrix} 2 \\ 2.15 \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 125^{\circ}C \end{bmatrix} - \begin{bmatrix} 2 \\ 2.15 \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 125^{\circ}C \end{bmatrix} - \begin{bmatrix} 2 \\ 2.15 \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 125^{\circ}C \end{bmatrix} - \begin{bmatrix} 2 \\ 3700 \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 125^{\circ}C \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 30V, V_{GE} = 0V, I_{C} = 130V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 125^{\circ}C \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 30V, V_{GE} = 0V, I_{C} = 130V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 30V, V_{GE} = 0V, I_{C} = 130V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 30V, V_{GE} = 0V, I_{C} = 130V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} 3700 \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix}$ $C_{oes} = \begin{bmatrix} I_{C} = 25A, V_{GE} = 15V \\ I_{C} = 15V \end{bmatrix} - \begin{bmatrix} I_{$		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	7.0	V
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	2.5	V
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	2.5	V
	-	V
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		V
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		
Cres Reverse Transfer Capacitance f=1MHz - 80 Switching Characteristics t _{d(on)} Turn-On Delay Time - 50	-	pF
Capacitance - 80 Switching Characteristics t _{d(on)} Turn-On Delay Time - 50	-	pF
Switching Characteristics t _{d(on)} Turn-On Delay Time - 50	-	pF
t _{d(on)} Turn-On Delay Time - 50		
, _, _,	-	ns
t_r Rise Time V_{cc} =600V, I_c =25A,	90	ns
$t_{d(off)}$ Turn-Off Delay Time $V_{CC}=000V, I_{C}=25A$, $-$ 190 $R_{G}=10\Omega, V_{GE}=15V$,	-	ns
t _f Fall Time Inductive Load,	180	ns
E _{on} Turn-On Switching Loss T _C =25°C - 4.1	6.2	mJ
E _{off} Turn-Off Switching Loss - 0.96	1.5	mJ
E _{ts} Total Switching Loss - 5.06	7.7	mJ
t _{d(on)} Turn-On Delay Time - 50	-	ns
t _r Rise Time - 60	-	ns
$t_{d(off)}$ Turn-Off Delay Time $V_{CC}=600V,I_{C}=25A,$ - 200	-	ns
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	-	ns
E _{on} Turn-On Switching Loss T _C =125°C - 4.3	6.9	mJ
E _{off} Turn-Off Switching Loss - 1.5	2.4	mJ
E _{ts} Total Switching Loss - 5.8	9.3	mJ
Q _g Total Gate Charge - 200	300	nC
Q_{ge} Gate to Emitter Charge $V_{cc}=600V,I_{c}=25A,$ $-$ 15		
Q_{gc} Gate to Collector Charge $V_{GE}=15V$ - 100	23	nC



http://www.ncepower.com

Electrical Characteristics of Diode T_C=25°C

Symbol	Parameter	Test Conditions		Min.	Тур.	Max.	Units
		I _F =25A	T _C =25°C	-	2.0	3.0	V
V_{FM}	Diode Forward Voltage	IF-25A	T _C =125°C	-	2.1		V
	Diode Reverse Recovery		T _C =25°C	-	235	350	ns
t _{rr}	Time		T _C =125°C	-	300		ns
	Diode Peak Reverse	I _F =25A,	T _C =25°C	-	27	40	Α
Irr	Recovery Current	dI/dt=200A/us	T _C =125°C	-	31		Α
	Diode Reverse Recovery		T _C =25°C	-	3130	4700	uC
Q_{rr}	Charge		T _C =125°C	-	4650		uC



http://www.ncepower.com

Typical Performance Characteristics

Figure 1. Typical Output Characteristics




Figure 3. Saturation Voltage vs. Case

Temperature at Variant Current Level




Figure 5. Saturation Voltage vs. V_{GE}




Figure 2. Typical Saturation Voltage Characteristics




Figure 4. Saturation Voltage vs. V_{GE}





Figure 6. Saturation Voltage vs. V_{GE}





http://www.ncepower.com

Typical Performance Characteristics (Continued)

Figure 7. Capacitance Characteristics




Figure 9. Turn-off Characteristics vs. Gate Resistance




Figure 11. Turn-on Characteristics vs. Collector Current




Figure 8. Turn-on Characteristics vs. Gate Resistance




Figure 10. Switching Loss vs. Gate Resistance





Figure 12. Turn-Off Characteristics vs.

Collector Current





http://www.ncepower.com

Typical Performance Characteristics (Continued)

Figure 13. Switching Loss vs. Collector Current




Figure 15. SOA Characteristics




Figure 14. Gate Charge Characteristics






Figure 16. Turn-Off SOA




Collector Emitter Voltage, (V)

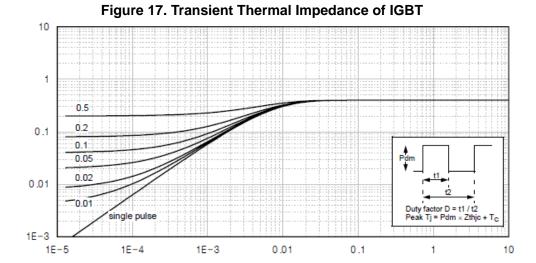

http://www.ncepower.com

TO-3P Mechanical Dimensions

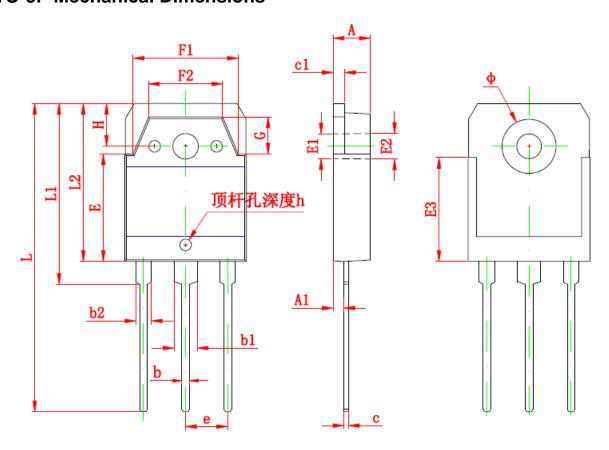

Symbol	Dimensions	In Millimeters	Dimension	nsions In Inches	
Symbol	Min	Max	Min	Max	
A	4.600	5.000	0.181	0.197	
A 1	1.200	1.600	0.047	0.063	
b	0.800	1.200	0.031	0.047	
b1	2.800	3.200	0.110	0.126	
b2	1.800	2.200	0.071	0.087	
С	0.500	0.700	0.020	0.028	
c 1	1.450	1.650	0.057	0.065	
D	15.450	15.850	0.606	0.622	
E	13.700	14.100	0.539	0.555	
E 1	3.200	REF	0.126	REF	
E 2	3.300	REF	0.130) REF	
E 3	13.45	0 REF	0.530) REF	
F 1	13.400	13.800	0.528	0.543	
F 2	9.400	9.800	0.370	0.386	
L	39.900	40.300	1.571	1.587	
L1	23.200	23.600	0.913	0.929	
L 2	20.300	20.600	0.799	0.811	
Ф	6.900	7.100	0.272	0.280	
G	5.150	5.550	0.203	0.219	
е	5.450		0.21	5 TYP	
Н	5.000	REF	0.197	'REF	
h	0.000	0.300	0.000	0.012	



http://www.ncepower.com

ATTENTION:

- Any and all NCE products described or contained herein do not have specifications that can handle applications that require
 - extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your NCE representative nearest you before using any NCE products described or contained herein in such applications.
- NCE assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all NCE products described or contained herein.
- Specifications of any and all NCE products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- NCE Power Semiconductor CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all NCE products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of NCE Power Semiconductor CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. NCE believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the NCE product that you intend to use.
- This catalog provides information as of Mar. 2010. Specifications and information herein are subject to change without notice.