


7810

3-terminal 1 A positive voltage regulator

Features

- Output Current up to 1 A
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor Safe Operating Area Protection



1.Input 2.Common 3.Output
TO-220 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Parameter	Symbol	Value	Unit
Input Voltage	V_I	35	V
Thermal Resistance Junction-Cases	$R_{\theta JC}$	5	°C/W
Thermal Resistance Junction-Air	$R_{\theta JA}$	65	°C/W
Operating Temperature Range	T_{OPR}	0 to + 125	°C
Storage Temperature Range	T_S	- 65 to + 150	°C

Electrical Characteristics

($0^\circ\text{C} < T_J < 125^\circ\text{C}$, $I_O = 500 \text{ mA}$, $V_I = 16 \text{ V}$, $C_L = 0.33 \mu\text{F}$, $C_O = 0.1 \mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$	9.6	10	10.4	V
		$5 \text{ mA} \leq I_O \leq 1 \text{ A}$, $P_O \leq 15 \text{ W}$ $V_I = 12.5 \text{ V to } 25 \text{ V}$	9.5	10	10.5	
Line Regulation ¹⁾	Regline	$T_J = 25^\circ\text{C}$	$V_I = 12.5 \text{ V to } 25 \text{ V}$	-	-	200
			$V_I = 13 \text{ V to } 20 \text{ V}$	-	-	100
Load Regulation ¹⁾	Regload	$T_J = 25^\circ\text{C}$	$I_O = 5 \text{ mA to } 1.5 \text{ A}$	-	-	200
			$I_O = 250 \text{ mA to } 750 \text{ mA}$	-	-	100
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$	-	-	8	mA
Quiescent Current Change	ΔI_Q	$I_O = 5 \text{ mA to } 1 \text{ A}$	-	-	0.5	mA
		$V_I = 13 \text{ V to } 29 \text{ V}$	-	-	1	
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_O = 5 \text{ mA}$	-	-1	-	mV/°C
Output Noise Voltage	V_N	$f = 10 \text{ Hz to } 100 \text{ KHz}$, $T_a = 25^\circ\text{C}$	-	58	-	μV
Ripple Rejection	RR	$f = 120 \text{ Hz}$, $V_I = 14 \text{ V to } 24 \text{ V}$	56	-	-	dB
Dropout Voltage	V_{Drop}	$I_O = 1 \text{ A}$, $T_J = 25^\circ\text{C}$	-	2	-	V
Output Resistance	R_O	$f = 1 \text{ KHz}$	-	17	-	mΩ
Short Circuit Current	I_{SC}	$V_I = 35 \text{ V}$, $T_a = 25^\circ\text{C}$	-	250	-	mA
Peak Current	I_{PK}	$T_J = 25^\circ\text{C}$	-	2.2	-	A

¹⁾ Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.



SEMTECH ELECTRONICS LTD.



Typical Performance Characteristics

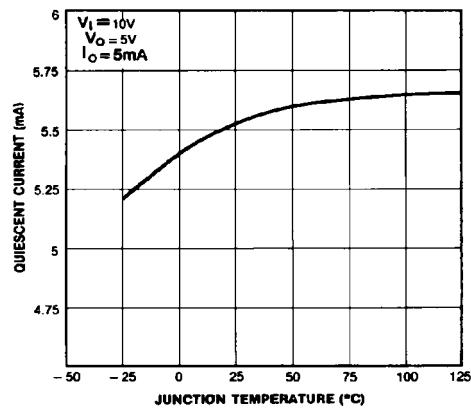


Figure 1. Quiescent Current

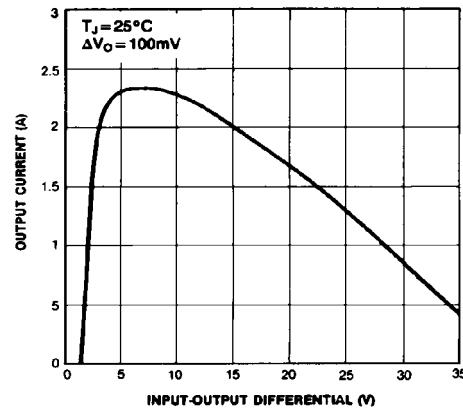


Figure 2. Peak Output Current

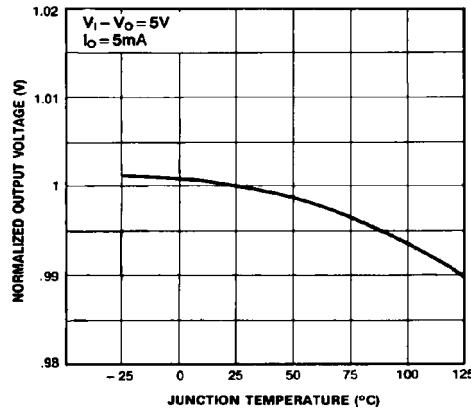


Figure 3. Output Voltage



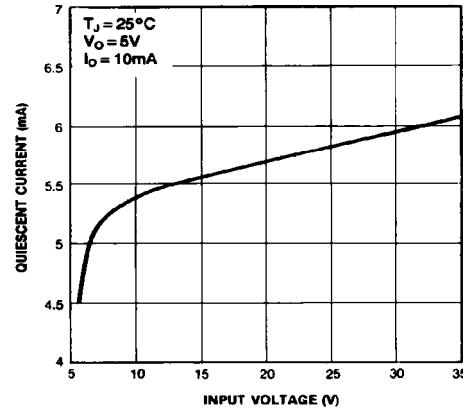


Figure 4. Quiescent Current




SEMTECH ELECTRONICS LTD.

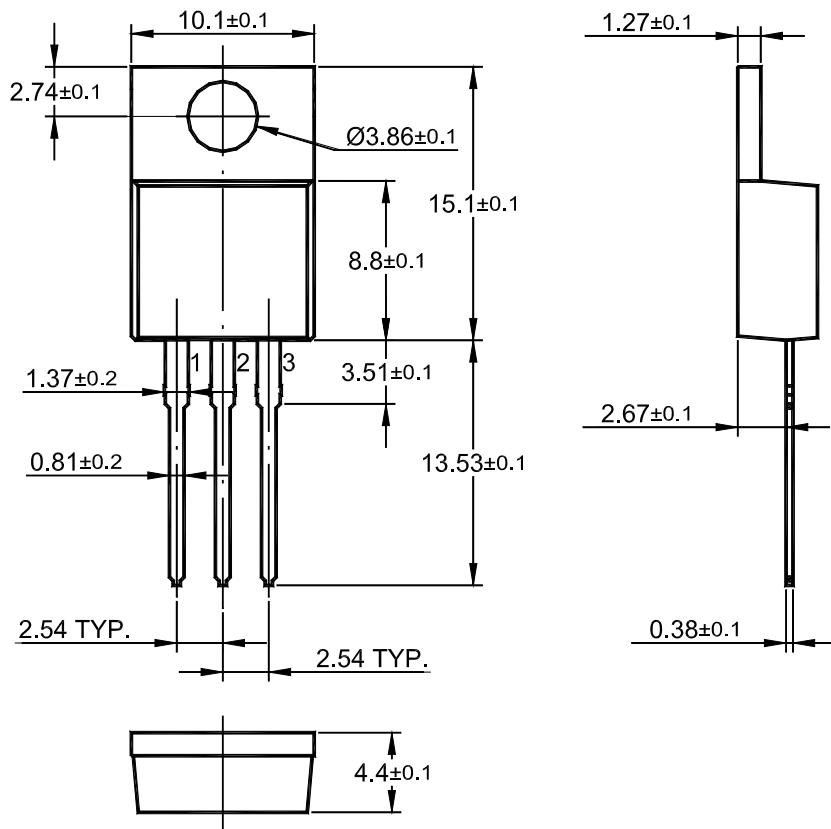

TO-220 PACKAGE OUTLINE

Dimensions in mm

**SEMTECH ELECTRONICS LTD.**ISO TS 16949 : 2009 ISO 14001 : 2004 ISO 9001 : 2008 BS-OHSAS 18001 : 2007 IECQ QC 080000
Certificate No. 1071366 Certificate No. 7116 Certificate No. 5073410 Certificate No. 7116 Certificate No. PRCH-SPM-148-1

Dated : 17/09/2016 Rev:01