

# FR151 THRU FR157

## FAST RECOVERY RECTIFIER




**REVERSE VOLTAGE:** 50 to 1000 VOLTS  
**FORWARD CURRENT:** 1.5 AMPERE

### FEATURES

- High current capability
- 1.5 ampere operation at  $T_A=55^\circ\text{C}$  with no thermal runaway.
- Fast switching for high efficiency
- Exceeds environmental standards of MIL-S-19500/228
- Low leakage.

### MECHANICAL DATA

Case: Molded plastic, DO-15  
 Epoxy: UL 94V-O rate flame retardant  
 Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed  
 Polarity: Color band denotes cathode end  
 Mounting position: Any  
 Weight: 0.015ounce, 0.4gram

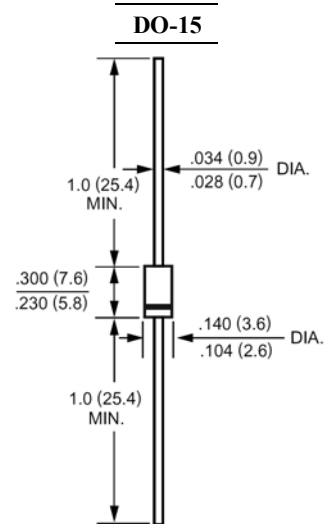

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.  
 Single phase, half wave,  $60\text{Hz}$ , resistive or inductive load.  
 For capacitive load, derate current by 20%.

|                                                                                                           | Symbols         | FR151       | FR152 | FR153 | FR154 | FR155 | FR156 | FR157 | Units                     |
|-----------------------------------------------------------------------------------------------------------|-----------------|-------------|-------|-------|-------|-------|-------|-------|---------------------------|
| Maximum Recurrent Peak Reverse Voltage                                                                    | $V_{RRM}$       | 50          | 100   | 200   | 400   | 600   | 800   | 1000  | Volts                     |
| Maximum RMS Voltage                                                                                       | $V_{RMS}$       | 35          | 70    | 140   | 280   | 420   | 560   | 700   | Volts                     |
| Maximum DC Blocking Voltage                                                                               | $V_{DC}$        | 50          | 100   | 200   | 400   | 600   | 800   | 1000  | Volts                     |
| Maximum Average Forward Rectified Current<br>.375"(9.5mm) Lead Length at $T_A=55^\circ\text{C}$           | $I_{(AV)}$      | 1.5         |       |       |       |       |       |       | Amp                       |
| Peak Forward Surge Current,<br>8.3ms single half-sine-wave<br>superimposed on rated load (JEDEC method)   | $I_{FSM}$       | 60          |       |       |       |       |       |       | Amp                       |
| Maximum Forward Voltage<br>at 1.5A DC and $25^\circ\text{C}$                                              | $V_F$           | 1.3         |       |       |       |       |       |       | Volts                     |
| Maximum Reverse Current at $T_A=25^\circ\text{C}$<br>at Rated DC Blocking Voltage $T_A=100^\circ\text{C}$ | $I_R$           |             |       |       |       | 5.0   |       |       | uAmp                      |
| Typical Junction Capacitance (Note 1)                                                                     | $C_J$           |             |       |       |       | 30    |       |       | pF                        |
| Typical Thermal Resistance (Note 2)                                                                       | $R_{\theta JA}$ |             |       |       |       | 45    |       |       | $^\circ\text{C}/\text{W}$ |
| Maximum Reverse Recovery Time (Note 3)                                                                    | $T_{RR}$        | 150         |       |       |       | 250   | 500   |       | nS                        |
| Operating and Storage Temperature Range                                                                   | $T_J, T_{stg}$  | -55 to +150 |       |       |       |       |       |       | $^\circ\text{C}$          |

### NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted.
- 3- Reverse Recovery Test Conditions:  $I_F=.5\text{A}$ ,  $I_R=1\text{A}$ ,  $I_{RR}=.25\text{A}$ .

# FR151 THRU FR157

## FAST RECOVERY RECTIFIER

### RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

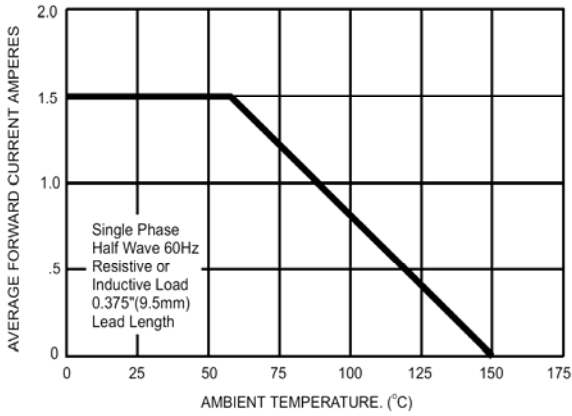


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

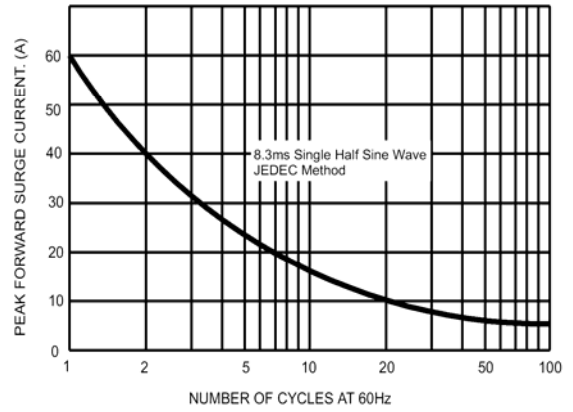


FIG.3- TYPICAL FORWARD CHARACTERISTICS

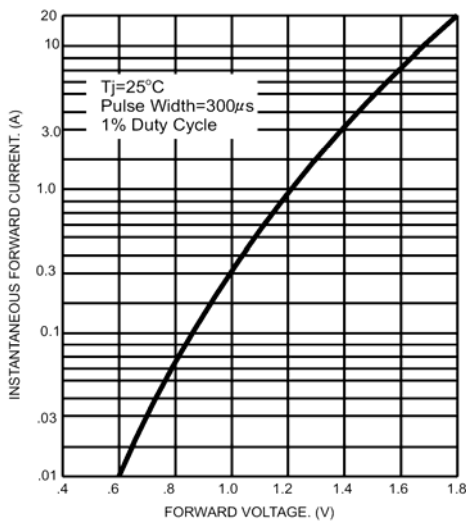


FIG.4- TYPICAL JUNCTION CAPACITANCE

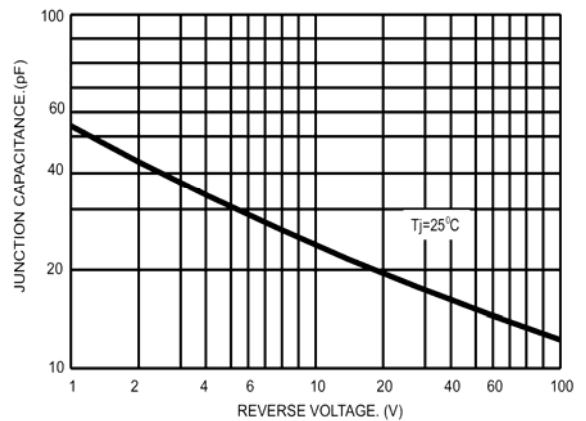


FIG.5- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

