

# FR801 THRU FR807

## GLASS PASSIVATED FAST RECOVERY RECTIFIER



**REVERSE VOLTAGE:** 50 to 1000 VOLTS  
**FORWARD CURRENT:** 8.0 AMPERE


### FEATURES

- Low forward voltage drop
- High current capability
- High capability
- High surge current capability

### MECHANICAL DATA

Case: Molded plastic, TO-220A  
 Epoxy: UL 94V-O rate flame retardant  
 Terminals: Leads solderable per MIL-STD-202 method 208 guaranteed  
 Polarity: As marked  
 Mounting position: Any  
 Weight: 0.08ounce, 2.24gram

### TO-220A

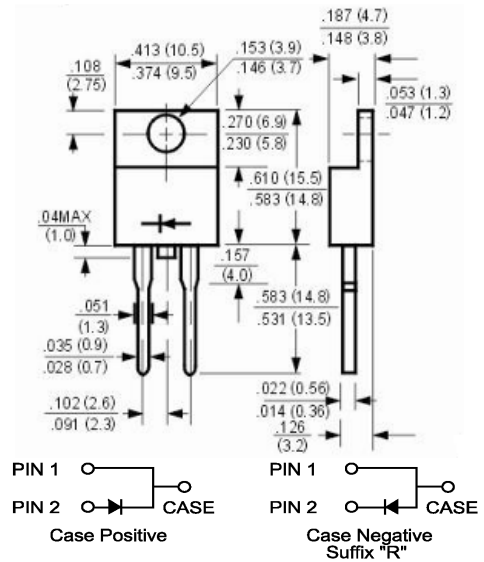

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

|                                                                                                        | Symbols         | FR801       | FR802 | FR803 | FR804 | FR805 | FR806 | FR807 | Units |
|--------------------------------------------------------------------------------------------------------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage                                                                 | $V_{RRM}$       | 50          | 100   | 200   | 400   | 600   | 800   | 1000  | Volts |
| Maximum RMS Voltage                                                                                    | $V_{RMS}$       | 35          | 70    | 140   | 280   | 420   | 560   | 700   | Volts |
| Maximum DC Blocking Voltage                                                                            | $V_{DC}$        | 50          | 100   | 200   | 400   | 600   | 800   | 1000  | Volts |
| Maximum Average Forward Rectified Current at $T_C=100^\circ\text{C}$                                   | $I_{(AV)}$      | 8.0         |       |       |       |       |       |       | Amp   |
| Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)      | $I_{FSM}$       | 150         |       |       |       |       |       |       | Amp   |
| Maximum Forward Voltage at 8.0A DC and 25°C                                                            | $V_F$           | 1.3         |       |       |       |       |       |       | Volts |
| Maximum Reverse Current at $T_C=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_C=125^\circ\text{C}$ | $I_R$           | 5.0<br>100  |       |       |       |       |       |       | uAmp  |
| Typical Junction Capacitance (Note 1)                                                                  | $C_J$           | 60          |       |       |       |       |       |       | pF    |
| Typical Thermal Resistance (Note 2)                                                                    | $R_{\theta JC}$ | 3           |       |       |       |       |       |       | °C/W  |
| Maximum Reverse Recovery Time (Note 3)                                                                 | $T_{RR}$        | 150         |       |       | 250   |       | 500   |       | nS    |
| Operating and Storage Temperature Range                                                                | $T_J, T_{stg}$  | -55 to +150 |       |       |       |       |       |       | °C    |

### NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Thermal Resistance from Junction to Case, Single Side Cooled.
- 3- Reverse Recovery Test Conditions:  $I_F=.5A$ ,  $I_R=1A$ ,  $I_{RR}=.25A$ .

# FR801 THRU FR807

## GLASS PASSIVATED FAST RECOVERY RECTIFIER

### RATINGS AND CHARACTERISTIC CURVES

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

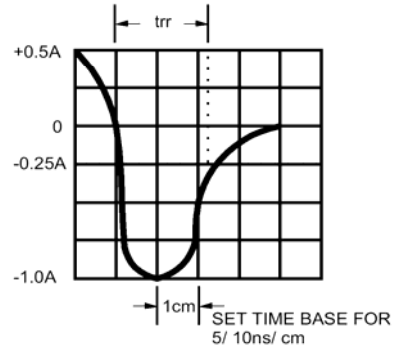
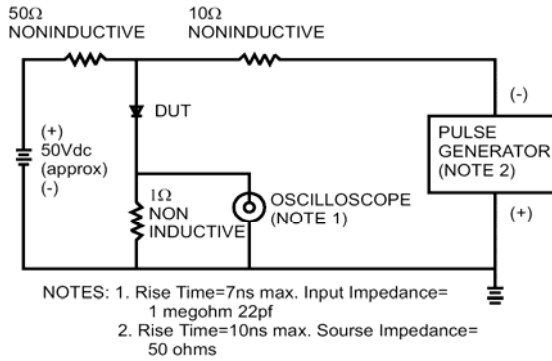


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

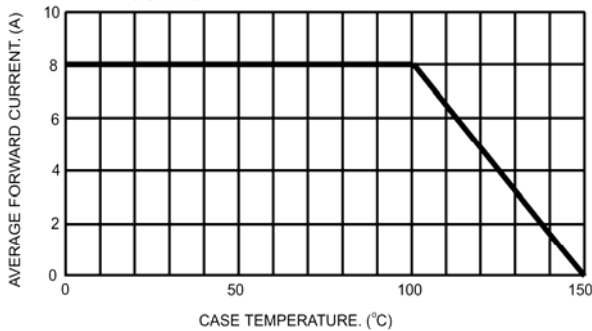


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

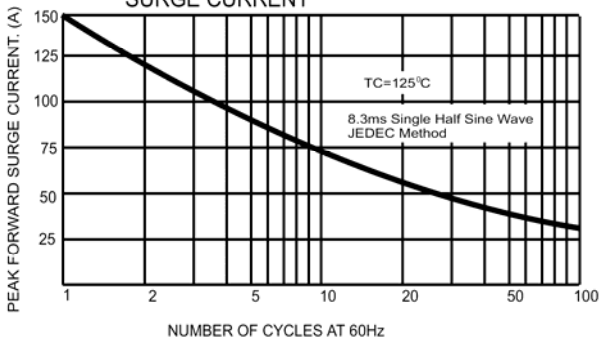


FIG.4- TYPICAL JUNCTION CAPACITANCE

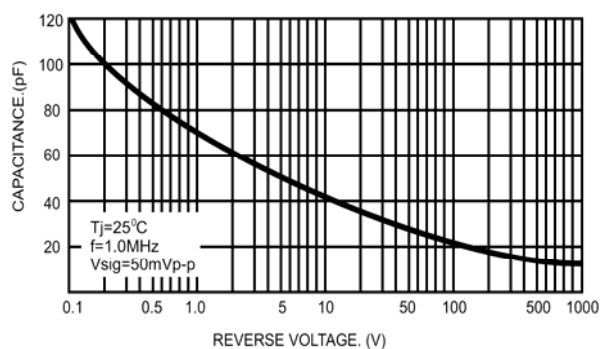


FIG.5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

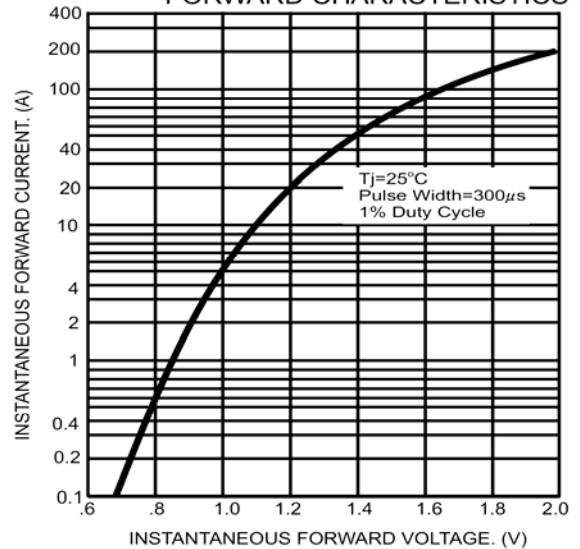


FIG.6- TYPICAL REVERSE CHARACTERISTICS

