

MBR3035PT THRU MBR30200PT

SCHOTTKY BARRIER RECTIFIER



康比電子
HORNBY ELECTRONIC

REVERSE VOLTAGE: 35 to 200 VOLTS
FORWARD CURRENT: 30.0 AMPERE

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- For use in low voltage, high frequency inverters, free whelling, and polarity protection applications
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case

MECHANICAL DATA

Case: Molded plastic, TO-3P/TO-247AD

Epoxy: UL 94V-O rate flame retardant


Terminals: Leads solderable per MIL-STD-202 method 208 guaranteed

Polarity: As marked

Mounting position: Any

Weight: 0.2ounce, 5.6gram

TO-3P/TO-247AD

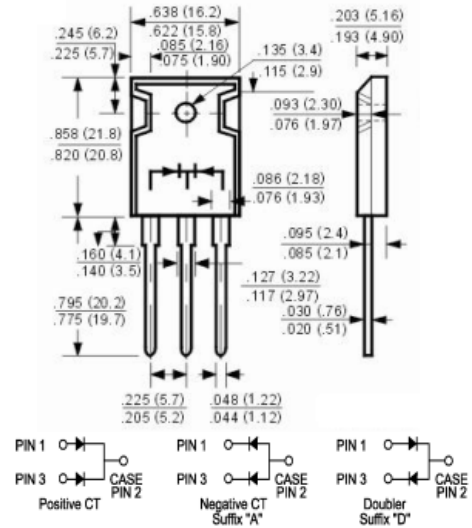

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	MBR3035PT	MBR3045PT	MBR3050PT	MBR3060PT	MBR3080PT	MBR30100PT	MBR30150PT	MBR30200PT	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	35	45	50	60	80	100	150	200	Volts
Maximum RMS Voltage	V_{RMS}	24	31	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	V_{DC}	35	45	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current (See Fig. 1)	$I_{(AV)}$	30.0								Amp
Peak repetitive forward current at $T_C = 105^\circ\text{C}$ (rated VR, sq. wave, 20 KHz)	I_{FRM}	30.0								Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	200								Amp
Peak repetitive reverse current at $t_p = 2.0\mu\text{s}$, 1KHz	I_{RRM}	1.0						2.0		Amp
Maximum Forward Voltage (Note 1)	V_F	at $I_F = 15\text{A}$, $T_C = 25^\circ\text{C}$		0.75		0.85		0.95		Volts
		at $I_F = 15\text{A}$, $T_C = 125^\circ\text{C}$		0.67		0.70		0.85		
		at $I_F = 30\text{A}$, $T_C = 25^\circ\text{C}$		0.84		0.95		-		
at $I_F = 30\text{A}$, $T_C = 125^\circ\text{C}$		0.75		0.84		-		-		
Maximum Reverse Current at Rated DC Blocking Voltage	I_R	1.0						2.0		mAmp
at $T_C = 125^\circ\text{C}$		60						100		
Typical Thermal Resistance	$R_{\theta JC}$	1.4								°C/W
Operating Temperature Range	T_J	-55 to +150								°C
Storage Temperature Range	T_{stg}	-55 to +150								°C

NOTES:

1- Pulse test: 300μs pulse width, 1% duty cycle

MBR3035PT THRU MBR30200PT SCHOTTKY BARRIER RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

FIG.1- FORWARD CURRENT DERATING CURVE

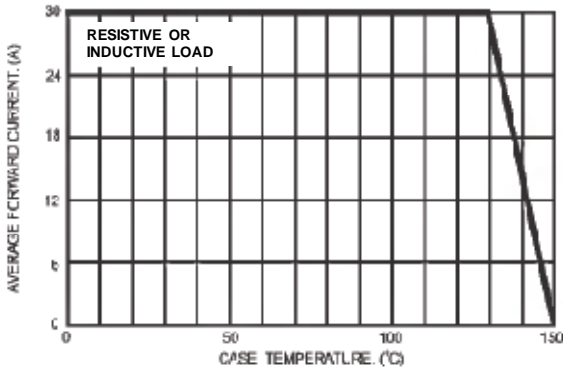


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

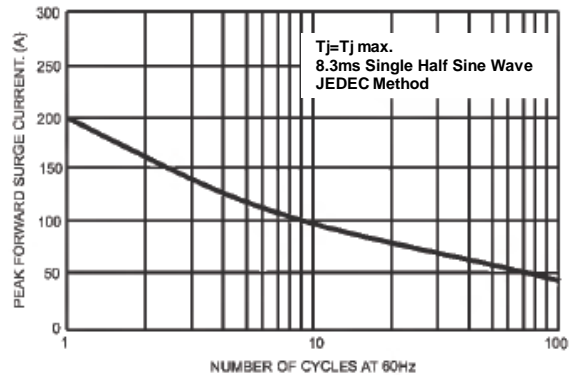


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

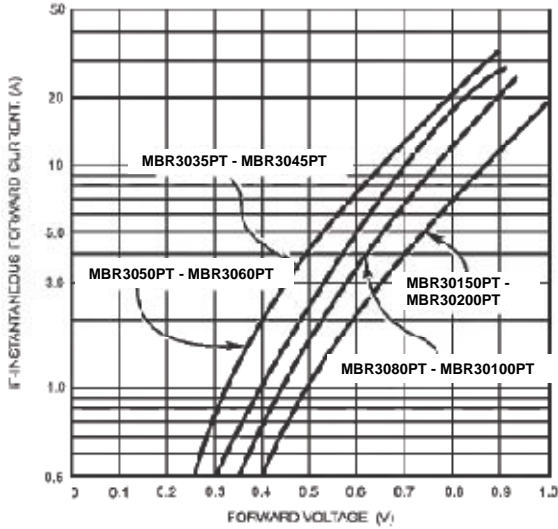


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

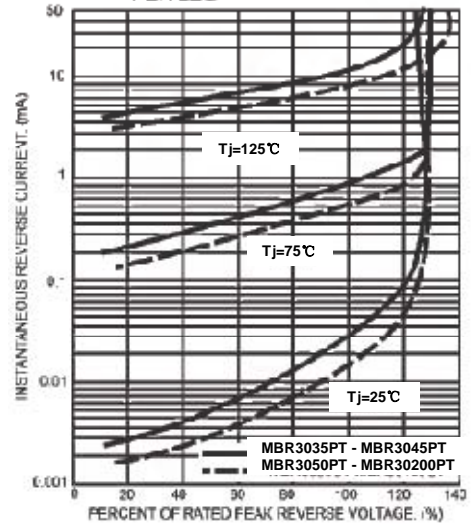


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

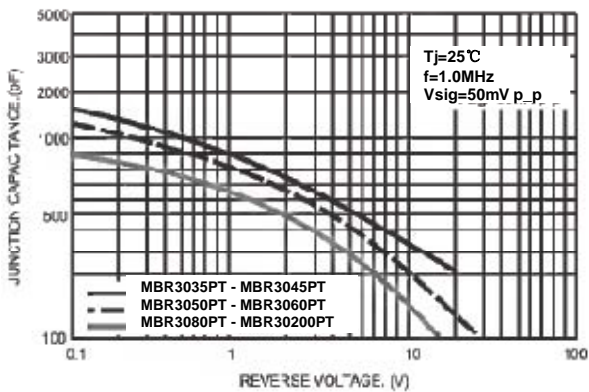


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PFR / FG

