



MMDT5210W...MMDT521ZW

NPN Silicon Epitaxial Planar Digital Transistor

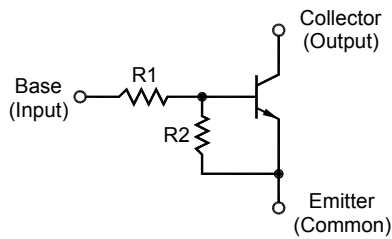


1.Base 2.Emitter 3.Collector
SOT-323 Plastic Package

Resistance Values

Type	R1 (K Ω)	R2 (K Ω)	Type	R1 (K Ω)	R2 (K Ω)
MMDT5210W	47	-	MMDT521DW	47	10
MMDT5211W	10	10	MMDT521EW	47	22
MMDT5212W	22	22	MMDT521FW	4.7	10
MMDT5213W	47	47	MMDT521KW	10	4.7
MMDT5214W	10	47	MMDT521LW	4.7	4.7
MMDT5215W	10	-	MMDT521MW	2.2	47
MMDT5216W	4.7	-	MMDT521NW	4.7	47
MMDT5217W	22	-	MMDT521TW	22	47
MMDT5218W	0.51	5.1	MMDT521VW	2.2	2.2
MMDT5219W	1	10	MMDT521ZW	4.7	22

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	50	V
Collector Emitter Voltage	V_{CEO}	50	V
Collector Current	I_C	100	mA
Total Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited




Dated : 20/11/2009 Rev: 01

MMDT5210W...MMDT521ZW

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 5\text{ V}$, $I_C = 10\text{ mA}$					
MMDT5218/521K/521L/521VW	h_{FE}	20	-	-	-
MMDT5219/521D/521FW		30	-	-	-
MMDT5211W		35	-	-	-
MMDT5212/521EW		60	-	-	-
MMDT521ZW		60	-	200	-
MMDT5213/5214/521MW		80	-	-	-
MMDT521N/521TW		80	-	400	-
MMDT5210/5215/5216/5217W ¹⁾		160	-	460	-
Collector Base Cutoff Current at $V_{CB} = 50\text{ V}$	I_{CBO}	-	-	100	nA
Emitter Base Cutoff Current at $V_{EB} = 6\text{ V}$					
MMDT5210/5215/5216/5217W	I_{EBO}	-	-	0.01	mA
MMDT5213W		-	-	0.1	
MMDT5212/5214/521D/521E/521M/521N/521TW		-	-	0.2	
MMDT521ZW		-	-	0.4	
MMDT5211W		-	-	0.5	
MMDT521F/521KW		-	-	1	
MMDT5219W		-	-	1.5	
MMDT5218/521L/521VW		-	-	2	
Collector Base Breakdown Voltage at $I_C = 10\text{ }\mu\text{A}$	$V_{(BR)CBO}$	50	-	-	V
Collector Emitter Breakdown Voltage at $I_C = 2\text{ mA}$	$V_{(BR)CEO}$	50	-	-	V
Collector Emitter Saturation Voltage at $I_C = 10\text{ mA}$, $I_B = 0.5\text{ mA}$	V_{CEsat}	-	-	0.3	V
Transition Frequency at $V_{CB} = 10\text{ V}$, $-I_E = 5\text{ mA}$, $f = 100\text{ MHz}$	f_T	-	250	-	MHz
Input Voltage (ON)					
at $V_O = 0.3\text{ V}$, $I_O = 20\text{ mA}$	$V_{I(ON)}$	-	-	3	V
at $V_O = 0.3\text{ V}$, $I_O = 20\text{ mA}$		-	-	2.5	
at $V_O = 0.3\text{ V}$, $I_O = 2\text{ mA}$		-	-	2.5	
at $V_O = 0.3\text{ V}$, $I_O = 2\text{ mA}$		-	-	5	
at $V_O = 0.3\text{ V}$, $I_O = 2\text{ mA}$		-	-	4	
at $V_O = 0.3\text{ V}$, $I_O = 10\text{ mA}$		-	-	3	
at $V_O = 0.2\text{ V}$, $I_O = 5\text{ mA}$		-	-	3	
at $V_O = 0.3\text{ V}$, $I_O = 2\text{ mA}$		-	-	3	
at $V_O = 0.3\text{ V}$, $I_O = 5\text{ mA}$		-	-	1.1	
at $V_O = 0.2\text{ V}$, $I_O = 5\text{ mA}$		-	-	1.7	
at $V_O = 0.3\text{ V}$, $I_O = 5\text{ mA}$		-	-	1.3	
at $V_O = 0.3\text{ V}$, $I_O = 1\text{ mA}$		-	-	1.4	
MMDT521V/521L/5219/5218W		-	-	-	
MMDT521FW		-	-	-	
MMDT521TW		-	-	-	

¹⁾ h_{FE} Rank Classification: Q: 160~260, R: 210~340, S: 290~460, No-rank: 160~460



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited




Dated : 20/11/2009 Rev: 01

MMDT5210W...MMDT521ZW

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
Input Voltage (OFF) at $V_{CC} = 5\text{ V}$, $I_o = 100\text{ }\mu\text{A}$	$V_{I(\text{OFF})}$	0.5 0.5 0.3 0.4 1 0.8	- - - - - -	- - - - - -	V
Input Resistance	R1	- 30%	0.51 1 2.2 4.7 10 22 47	+ 30%	K Ω
Resistance Ratio	R1/R2	- - 0.08 - 0.17 - 0.37 - 0.8 1.7 1.7 3.7	0.047 0.1 0.1 0.21 0.21 0.47 0.47 1 1 2.13 2.14 4.7	- - 0.12 - 0.25 - 0.57 - 1.2 2.6 2.6 5.7	- - - - - - - - - - - -



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 20/11/2009 Rev: 01