

# SK12 THRU SK110

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER



康比電子  
HORNBY ELECTRONIC


**REVERSE VOLTAGE:** 20 to 100 VOLTS

**FORWARD CURRENT:** 1.0 AMPERE

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- High current capacity
- Built-in strain relief
- Low profile package
- Metal to silicon rectifier, majority carrier conduction
- High surge capacity
- Low power loss, high efficiency
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering : 250°C / 10 seconds at terminals

### DO-214AA(SMB)

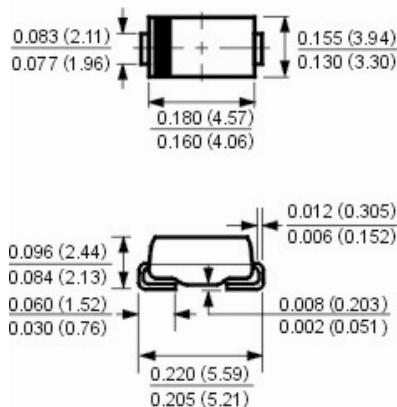

### MECHANICAL DATA

Case: Molded plastic, DO-214AA(SMB)

### Dimensions in inches and (millimeters)

Terminals: Axial leads, solderable per MIL-STD-750, method 2026 guaranteed

Polarity: Color band denotes cathode end

Packaging: 12mm tape per EIA STD RS-481

Weight: 0.003 ounce, 0.093 gram

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

|  | Symbols                 | SK12        | SK13 | SK14 | SK15 | SK16 | SK18 | SK19  | SI10 | Units |  |  |  |  |
|--|-------------------------|-------------|------|------|------|------|------|-------|------|-------|--|--|--|--|
| <b>Maximum Recurrent Peak Reverse Voltage</b>  | <b>V<sub>RRM</sub></b>  | 20          | 30   | 40   | 50   | 60   | 80   | 90    | 100  | Volts |  |  |  |  |
| <b>Maximum RMS Voltage</b>   | <b>V<sub>RMS</sub></b>  | 14          | 21   | 28   | 35   | 42   | 56   | 64    | 71   | Volts |  |  |  |  |
| <b>Maximum DC Blocking Voltage</b>   | <b>V<sub>DC</sub></b>   | 20          | 30   | 40   | 50   | 60   | 80   | 90    | 100  | Volts |  |  |  |  |
| <b>Maximum Average Forward Rectified Current at T<sub>L</sub> (See Fig. 1)</b>                           | <b>I<sub>(AV)</sub></b> | 1.0         |      |      |      |      |      |       | Amp  |       |  |  |  |  |
| <b>Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)</b> | <b>I<sub>FSM</sub></b>  | 30          |      |      |      |      |      |       | Amp  |       |  |  |  |  |
| <b>Maximum Forward Voltage at 1.0A (Note 1)</b>  | <b>V<sub>F</sub></b>    | 0.50        |      | 0.70 |      | 0.85 |      | Volts |      |       |  |  |  |  |
| <b>Maximum Reverse Current at T<sub>A</sub>=25°C at Rated DC Blocking Voltage T<sub>A</sub>=100°C</b>    | <b>I<sub>R</sub></b>    | 0.5<br>20   |      |      |      |      |      |       | mAmp |       |  |  |  |  |
| <b>Typical Thermal Resistance (Note 2)</b>   | <b>R<sub>0JA</sub></b>  | 90          |      |      |      |      |      |       | °C/W |       |  |  |  |  |
|  | <b>R<sub>0JL</sub></b>  | 35          |      |      |      |      |      |       | °C   |       |  |  |  |  |
| <b>Operating Junction Temperature Range</b>  | <b>T<sub>J</sub></b>    | -55 to +125 |      |      |      |      |      |       | °C   |       |  |  |  |  |
| <b>Storage Temperature Range</b>   | <b>T<sub>stg</sub></b>  | -55 to +150 |      |      |      |      |      |       | °C   |       |  |  |  |  |

### NOTES:

1- Pulse test: 300μs pulse width, 1% duty cycle

2- P.C.B. mounted with 0.2 x 0.2" (5.0 x 5.0mm) Copper Pad Areas

# SK12 THRU SK110

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER



康比電子  
HORNBY ELECTRONIC

### RATINGS AND CHARACTERISTIC CURVES

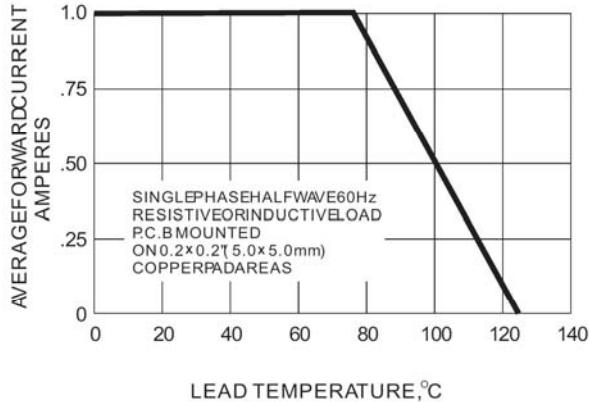


Fig.1-FORWARD CURRENT DERATING CURVE

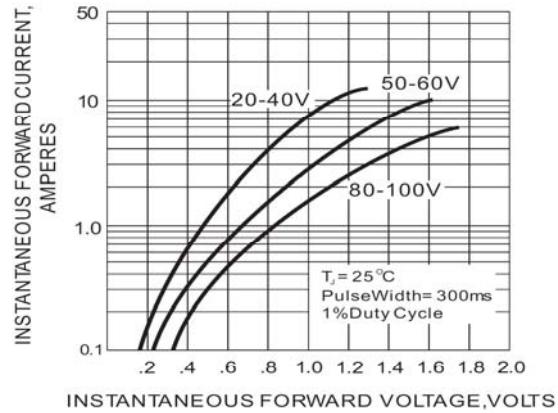


Fig.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

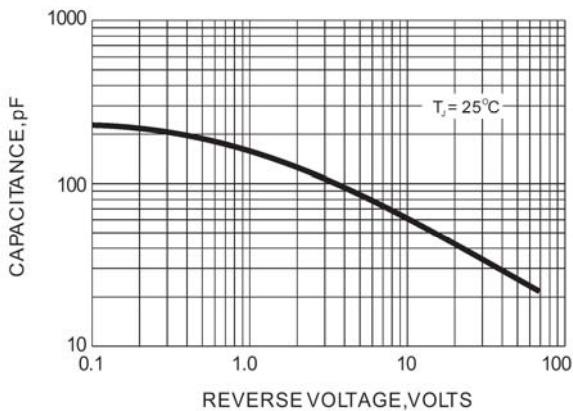


Fig.3-TYPICAL JUNCTION CAPACITANCE

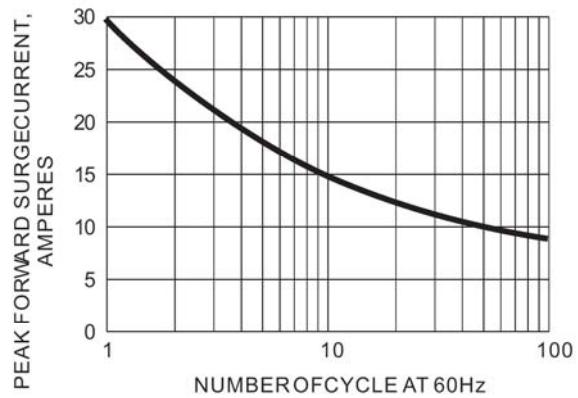


Fig.4-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT