

ZMCRD...S Series

Silicon Epitaxial Planar Zener Diodes


Features

- Sharp breakdown characteristic

Applications

- Circuits for constant voltage, constant current wave form clipper, surge absorber, etc

LS-31

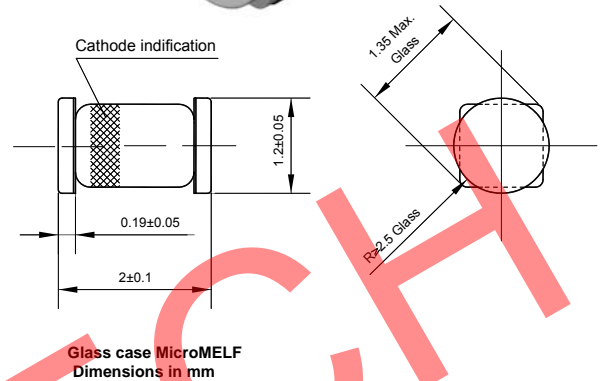


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	500	mW
Forward Current	I_F	100	mA
Reverse Surge Power (at $t = 10 \mu\text{s} / 1 \text{ pulse}$)	P_{RSM}	85	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$ ($V_F = 1 \text{ V Max. at } I_F = 100 \text{ mA}$)

Type	Zener Voltage ⁽¹⁾			Dynamic Resistance		Reverse Leakage Current	
	V_Z		at I_{ZT}	Z_{ZT}	at I_{ZT}	I_R	at V_R
	Min. (V)	Max. (V)	(mA)	Max. (Ω)	(mA)	Max. (μA)	(V)
ZMCRD2V0SB	1.8	2.15	5	100	5	120	0.5
ZMCRD2V2SB	2.1	2.4	5	100	5	120	0.7
ZMCRD2V4SB	2.3	2.6	5	100	5	120	1
ZMCRD2V7SB	2.5	2.9	5	110	5	120	1
ZMCRD2V7SB1	2.5	2.75	5	110	5	120	1
ZMCRD2V7SB2	2.65	2.9	5	110	5	120	1
ZMCRD3V0SB	2.8	3.2	5	120	5	50	1
ZMCRD3V0SB1	2.8	3.05	5	120	5	50	1
ZMCRD3V0SB2	2.95	3.2	5	120	5	50	1
ZMCRD3V3SB	3.1	3.5	5	130	5	20	1



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited




Dated : 10/09/2009

ZMCRD...S Series

Characteristics at $T_a = 25^\circ\text{C}$ ($V_F = 1\text{ V Max. at } I_F = 100\text{ mA}$)

Type	Zener Voltage ¹⁾			Dynamic Resistance		Reverse Leakage Current	
	V_Z		at I_{ZT}	Z_{ZT}	at I_{ZT}	I_R	at V_R
	Min. (V)	Max. (V)	(mA)	Max. (Ω)	(mA)	Max. (μA)	(V)
ZMCRD3V3SB1	3.1	3.35	5	130	5	20	1
ZMCRD3V3SB2	3.25	3.5	5	130	5	20	1
ZMCRD3V6SB	3.4	3.8	5	130	5	10	1
ZMCRD3V6SB1	3.4	3.65	5	130	5	10	1
ZMCRD3V6SB2	3.55	3.8	5	130	5	10	1
ZMCRD3V9SB	3.7	4.1	5	130	5	10	1
ZMCRD3V9SB1	3.7	3.97	5	130	5	10	1
ZMCRD3V9SB2	3.87	4.1	5	130	5	10	1
ZMCRD4V3SB	4	4.49	5	130	5	10	1
ZMCRD4V3SB1	4	4.22	5	130	5	10	1
ZMCRD4V3SB2	4.14	4.35	5	130	5	10	1
ZMCRD4V3SB3	4.27	4.49	5	130	5	10	1
ZMCRD4V7SB	4.4	4.92	5	130	5	10	1
ZMCRD4V7SB1	4.4	4.63	5	130	5	10	1
ZMCRD4V7SB2	4.53	4.77	5	130	5	10	1
ZMCRD4V7SB3	4.67	4.92	5	130	5	10	1
ZMCRD5V1SB	4.82	5.39	5	130	5	5	1.5
ZMCRD5V1SB1	4.82	5.06	5	130	5	5	1.5
ZMCRD5V1SB2	4.96	5.22	5	130	5	5	1.5
ZMCRD5V1SB3	5.12	5.39	5	130	5	5	1.5
ZMCRD5V6SB	5.29	5.94	5	80	5	5	2.5
ZMCRD5V6SB1	5.29	5.57	5	80	5	5	2.5
ZMCRD5V6SB2	5.47	5.75	5	80	5	5	2.5
ZMCRD5V6SB3	5.65	5.94	5	80	5	5	2.5
ZMCRD6V2SB	5.84	6.55	5	50	5	2	3
ZMCRD6V2SB1	5.84	6.14	5	50	5	2	3
ZMCRD6V2SB2	6.04	6.35	5	50	5	2	3
ZMCRD6V2SB3	6.24	6.55	5	50	5	2	3
ZMCRD6V8SB	6.44	7.17	5	30	5	2	3.5
ZMCRD6V8SB1	6.44	6.76	5	30	5	2	3.5
ZMCRD6V8SB2	6.62	6.96	5	30	5	2	3.5
ZMCRD6V8SB3	6.83	7.17	5	30	5	2	3.5
ZMCRD7V5SB	7.03	7.87	5	30	5	2	4
ZMCRD7V5SB1	7.03	7.39	5	30	5	2	4
ZMCRD7V5SB2	7.25	7.63	5	30	5	2	4
ZMCRD7V5SB3	7.49	7.87	5	30	5	2	4
ZMCRD8V2SB	7.73	8.67	5	30	5	2	5
ZMCRD8V2SB1	7.73	8.13	5	30	5	2	5
ZMCRD8V2SB2	7.98	8.39	5	30	5	2	5
ZMCRD8V2SB3	8.25	8.67	5	30	5	2	5
ZMCRD9V1SB	8.53	9.58	5	30	5	2	6
ZMCRD9V1SB1	8.53	8.96	5	30	5	2	6
ZMCRD9V1SB2	8.81	9.26	5	30	5	2	6
ZMCRD9V1SB3	9.12	9.58	5	30	5	2	6



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited




Dated : 10/09/2009

ZMCRD...S Series

Characteristics at $T_a = 25^\circ\text{C}$ ($V_F = 1\text{ V Max. at } I_F = 100\text{ mA}$)

Type	Zener Voltage ¹⁾			Dynamic Resistance		Reverse Leakage Current	
	V_Z		at I_{ZT}	Z_{ZT}	at I_{ZT}	I_R	at V_R
	Min. (V)	Max. (V)	(mA)	Max. (Ω)	(mA)	Max. (μA)	(V)
ZMCRD10SB	9.42	10.58	5	30	5	2	7
ZMCRD10SB1	9.42	9.9	5	30	5	2	7
ZMCRD10SB2	9.74	10.24	5	30	5	2	7
ZMCRD10SB3	10.08	10.58	5	30	5	2	7
ZMCRD11SB	10.4	11.6	5	30	5	2	8
ZMCRD11SB1	10.4	10.92	5	30	5	2	8
ZMCRD11SB2	10.72	11.26	5	30	5	2	8
ZMCRD11SB3	11.06	11.6	5	30	5	2	8
ZMCRD12SB	11.38	12.64	5	35	5	2	9
ZMCRD12SB1	11.38	11.94	5	35	5	2	9
ZMCRD12SB2	11.69	12.28	5	35	5	2	9
ZMCRD12SB3	12.04	12.64	5	35	5	2	9
ZMCRD13SB	12.43	14	5	35	5	2	10
ZMCRD15SB	13.8	15.56	5	40	5	2	11
ZMCRD16SB	15.31	17.14	5	40	5	2	12
ZMCRD18SB	16.89	19.08	5	45	5	2	13
ZMCRD20SB	18.8	21.14	5	50	5	2	15
ZMCRD22SB	20.81	23.25	5	55	5	2	17
ZMCRD24SB	22.86	25.66	5	60	5	2	19
ZMCRD27SB	25.1	28.9	2	70	2	2	21
ZMCRD30SB	28	32	2	80	2	2	23
ZMCRD33SB	31	35	2	80	2	2	25
ZMCRD36SB	34	38	2	90	2	2	27
ZMCRD39SB	37	41	2	100	2	2	30
ZMCRD43SB	40	45	2	130	2	2	33
ZMCRD47SB	44	49	2	150	2	2	36
ZMCRD51SB	48	54	2	180	2	1	39
ZMCRD56SB	53	60	2	180	2	1	43
ZMCRD62SB	58	66	2	200	2	0.2	47
ZMCRD68SB	64	72	2	250	2	0.2	52
ZMCRD75SB	70	79	2	300	2	0.2	57

¹⁾ V_Z is tested with pulse (20 ms).



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 10/09/2009