

#### http://www.ncepower.com

## **NCE25G135T**

## 1350V, 25A, Trench NPT IGBT

#### **Features**

- Trench NPT( Non Punch Through) IGBT
- High speed switching
- Low saturation voltage: V<sub>CE(sat)</sub>=2.0V@I<sub>C</sub>=25A
- High input impedance




## **Applications**

- Inductive heating, Microwave oven, Inverter, UPS, etc.
- Soft switching applications

## **General Description**

Using advanced Trench NPT technology, NCE's 1350V IGBTs offers superior conduction and switching performances, and easy parallel operation with exceptional avalanche ruggedness. This device is designed for soft switching applications.



## **Absolute Maximum Ratings**

Symbol	Description	Ratings	Units
V <sub>CES</sub>	Collector to Emitter Voltage	1350	V
$V_{GES}$	Gate to Emitter Voltage	+/-30	V
I <sub>C</sub>	Continuous Collector Current @T <sub>C</sub> =25°C	50	Α
	Continuous Collector Current @T <sub>C</sub> =100°C	25	Α
I <sub>CM</sub> (1)	Pulsed Collector Current	90	Α
P <sub>D</sub>	Maximum Power Dissipation @T <sub>C</sub> =25°C	312	W
	Maximum Power Dissipation @T <sub>C</sub> =100°C	125	W
TJ	Operating Junction Temperature	-55 to +150	°C
T <sub>stg</sub>	Storage Temperature Range	-55 to +150	°C
	Maximum Lead Temp. for soldering Purposes, 1/8" from		
$T_L$	case for 5seconds	300	°C

#### Notes:

<sup>1.</sup> Repetitive rating, Pulse width limited by max. junction temperature



#### http://www.ncepower.com

## **Thermal Characteristics**

Symbol	Parameter	Тур.	Max.	Units
R <sub>JC</sub>	Thermal Resistance, Junction to Case	-	0.4	°C/W
$R_{JA}$	Thermal Resistance, Junction to Ambient	-	40	°C/W

## Electrical Characteristics of the IGBT $T_{c=25}^{\circ}C$

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Units	
Off Characteristics							
BV <sub>CES</sub>	Collector to Emitter		1250		-	V	
	Breakdown Voltage	V <sub>GE</sub> =0V, Ic=1mA	1350	-			
I <sub>CES</sub>	Collector Cut-Off Current	V <sub>CE</sub> =1350V, V <sub>GE</sub> =0V	-	-	1	mA	
I <sub>GES</sub>	G-E Leakage Current	V <sub>GE</sub> =20V, V <sub>CE</sub> =0V	-	-	+/-250	nA	
On Char	On Characteristics						
$V_{GE(th)}$	G-E Threshold Voltage	$I_C$ =25mA, $V_{CE}$ = $V_{GE}$	4.0	5.5	7.0	V	
	Collector to Emitter Saturation Voltage	I <sub>C</sub> =25A, V <sub>GE</sub> =15V		2	2.5	V	
V "		T <sub>C</sub> =25°C	-		2.5		
V <sub>CE(sat)</sub>		I <sub>C</sub> =25A, V <sub>GE</sub> =15V		2.15	_	V	
		T <sub>C</sub> =125°C	_	2.13	_	v	
Dynamic	Dynamic Characteristics						
C <sub>ies</sub>	Input Capacitance		-	3700	-	pF	
$C_oes$	Output Capacitance	$V_{CE}$ =30V, $V_{GE}$ =0V,	-	130	-	pF	
$C_res$	Reverse Transfer	f=1MHz	- 80		pF		
Ores	Capacitance			80	_	pΓ	
Switchin	g Characteristics						
$t_{d(on)}$	Turn-On Delay Time		-	50	-	ns	
t <sub>r</sub>	Rise Time	\/ -600\/  -254	-	60	90	ns	
$t_{d(off)}$	Turn-Off Delay Time	$V_{CC}=600V,I_{C}=25A,$	-	190	-	ns	
t <sub>f</sub>	Fall Time	$R_G=10\Omega, V_{GE}=15V,$ Resistive Load,	-	100	180	ns	
E <sub>on</sub>	Turn-On Switching Loss	T <sub>C</sub> =25°C	-	4.1	6.2	mJ	
E <sub>off</sub>	Turn-Off Switching Loss	1 <sub>C</sub> -25 C	-	0.96	1.5	mJ	
E <sub>ts</sub>	Total Switching Loss		-	5.06	7.7	mJ	
t <sub>d(on)</sub>	Turn-On Delay Time		-	50	-	ns	
t <sub>r</sub>	Rise Time	\/ -000\/   -054	-	60	-	ns	
t <sub>d(off)</sub>	Turn-Off Delay Time	$V_{CC}=600V,I_{C}=25A,$	-	200	-	ns	
t <sub>f</sub>	Fall Time	$R_G=10\Omega,V_{GE}=15V,$ Resistive Load, $T_C=125^{\circ}C$	-	154	-	ns	
E <sub>on</sub>	Turn-On Switching Loss		-	4.3	6.9	mJ	
E <sub>off</sub>	Turn-Off Switching Loss		-	1.5	2.4	mJ	
E <sub>ts</sub>	Total Switching Loss		-	5.8	9.3	mJ	
$Q_g$	Total Gate Charge	\/ 000\/\ 000\	-	200	300	nC	
$Q_{ge}$	Gate to Emitter Charge	$V_{CC}=600V,I_{C}=25A,$	-	15	23	nC	
$Q_{gc}$	Gate to Collector Charge	V <sub>GE</sub> =15V	-	100	150	nC	



#### http://www.ncepower.com

## **Typical Performance Characteristics**

**Figure 1. Typical Output Characteristics** 

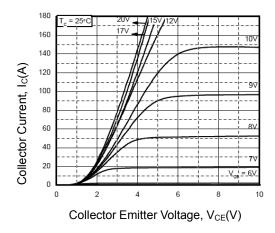


Figure 3. Saturation Voltage vs. Case

Temperature at Variant Current Level

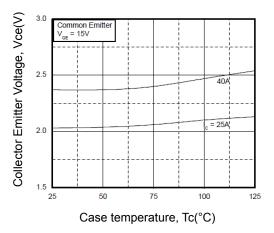


Figure 5. Saturation Voltage vs. V<sub>GE</sub>

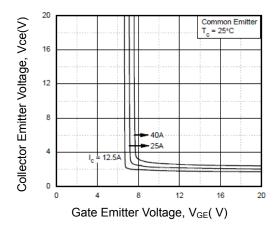


Figure 2. Typical Saturation Voltage Characteristics

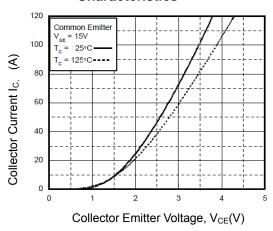


Figure 4. Saturation Voltage vs. V<sub>GE</sub>


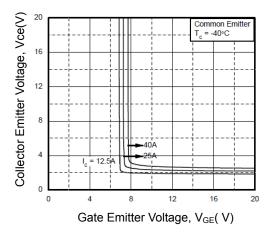


Figure 6. Saturation Voltage vs. V<sub>GE</sub>

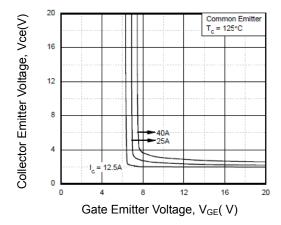

#### http://www.ncepower.com

## **Typical Performance Characteristics (Continued)**

Figure 7. Capacitance Characteristics

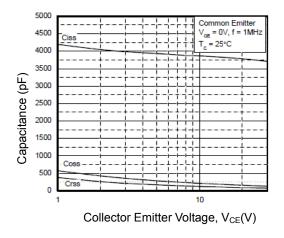


Figure 8. Turn-on Characteristics vs. Gate Resistance

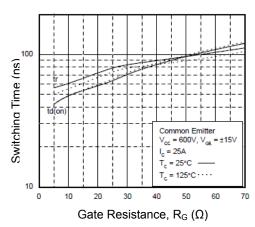


Figure 9. Turn-off Characteristics vs. Gate Resistance

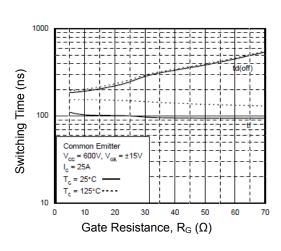


Figure 10. Switching Loss vs. Gate Resistance

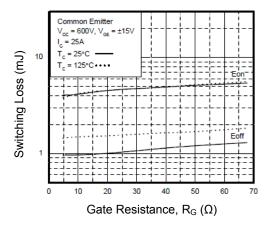


Figure 11. Turn-on Characteristics vs. Collector Current


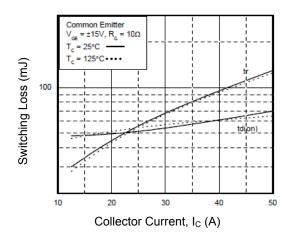


Figure 12. Turn-Off Characteristics vs.

Collector Current

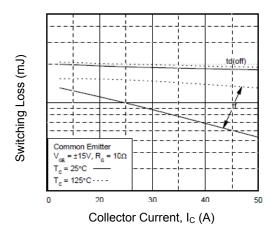

#### http://www.ncepower.com

## **Typical Performance Characteristics (Continued)**

Figure 13. Switching Loss vs. Collector Current

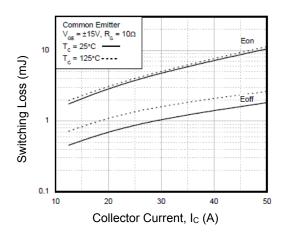


Figure 14. Gate Charge Characteristics

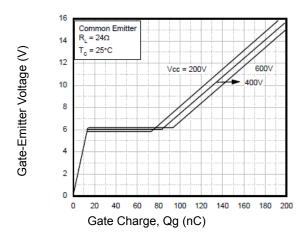


Figure 15. SOA Characteristics

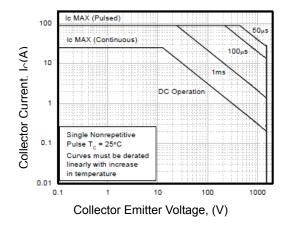


Figure 16. Turn-Off SOA



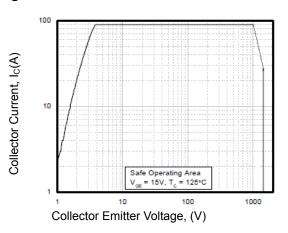


Figure 17. Transient Thermal Impedance of IGBT

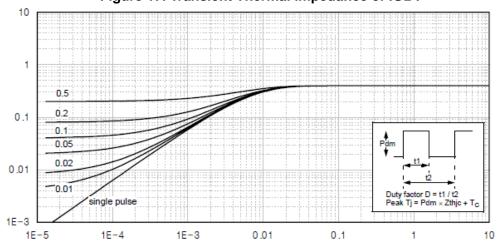

http://www.ncepower.com

# **TO-247 Package Information**

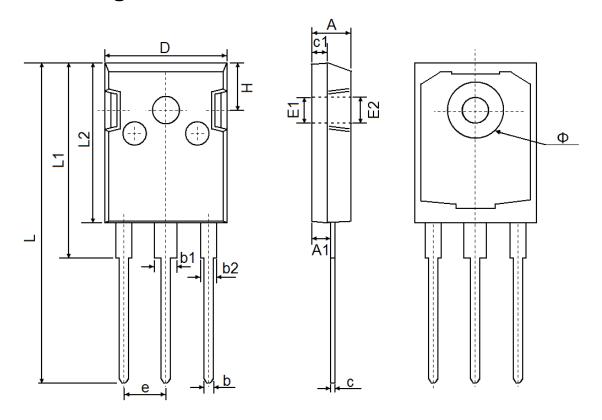

Symbol	Dimensions	In Millimeters	Dimensions	s In Inches	
	Min.	Max.	Min.	Max.	
A	4.850	5.150	0.191	0.200	
A1	2.200	2.600	0.087	0.102	
b	1.000	1.400	0.039	0.055	
b1	2.800	3.200	0.110	0.126	
b2	1.800	2.200	0.071	0.087	
С	0.500	0.700	0.020	0.028	
c1	1.900	2.100	0.075	0.083	
D	15.450	15.750	0.608	0.620	
E1	3.500 REF 0.138 REF		REF		
E2	3.600 REF		0.142 REF		
L	40.900	41.300	1.610	1.626	
L1	24.800	25.100	0.976	0.988	
L2	20.300	20.600	0.799	0.811	
Ф	7.100	7.300	0.280	0.287	
е	5.450 TYP		0.215 TYP		
Н	5.980 REF 0.235 REF		REF		



#### http://www.ncepower.com

#### ATTENTION:

- Any and all NCE products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your NCE representative nearest you before using any NCE products described or contained herein in such applications.
- NCE assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all NCE products described or contained herein.
- Specifications of any and all NCE products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- NCE Power Semiconductor CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all NCE products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of NCE Power Semiconductor CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. NCE believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the NCE product that you intend to use.
- This catalog provides information as of Mar. 2010. Specifications and information herein are subject to change without notice.