

SF161PT THRU SF166PT

GLASS PASSIVATED SUPER FAST RECTIFIER

REVERSE VOLTAGE: 50 to 400 VOLTS

FORWARD CURRENT: 16.0 AMPERE

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Superfast switching time for high efficiency
- Low forward voltage drop and high current capability
- High surge capacity.
- Low reverse leakage current

MECHANICAL DATA

Case: Molded plastic, TO-3P/TO-247AD

Epoxy: UL 94V-O rate flame retardant

Terminals: Leads solderable per MIL-STD-202



method 208 guaranteed

Polarity: As marked

Mounting position: Any

Weight: 0.2ounce, 5.6gram

TO-3P/TO-247AD

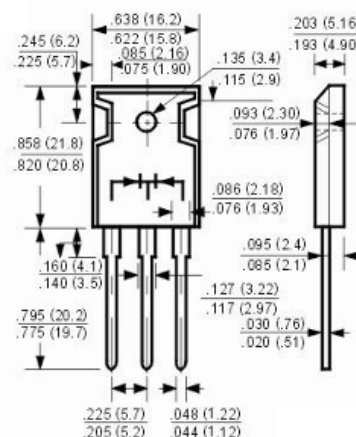

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	SF161PT	SF162PT	SF163PT	SF164PT	SF165PT	SF166PT	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	Volts
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	Volts
Maximum Average Forward Rectified Current at T _C =100℃	I _(AV)	16.0						Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	200						Amp
Maximum Forward Voltage at 8.0A and T _A =25℃	V _F	0.95				1.3		Volts
Maximum Reverse Current at T _C =25℃ at Rated DC Blocking Voltage T _C =100℃	I _R	10.0 100						uAmp
Typical Junction Capacitance (Note 1)	C _J	85						pF
Maximum Reverse Recovery Time (Note 2)	T _{RR}	35				50		nS
Operating and Storage Temperature Range	T _J , T _{stg}	-55 to +150						℃

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Reverse Recovery Test Conditions: $I_F=5A$, $I_R=1A$, $I_{RR}=25A$.

SF161PT THRU SF166PT

GLASS PASSIVATED SUPER FAST RECTIFIER



RATINGS AND CHARACTERISTIC CURVES

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

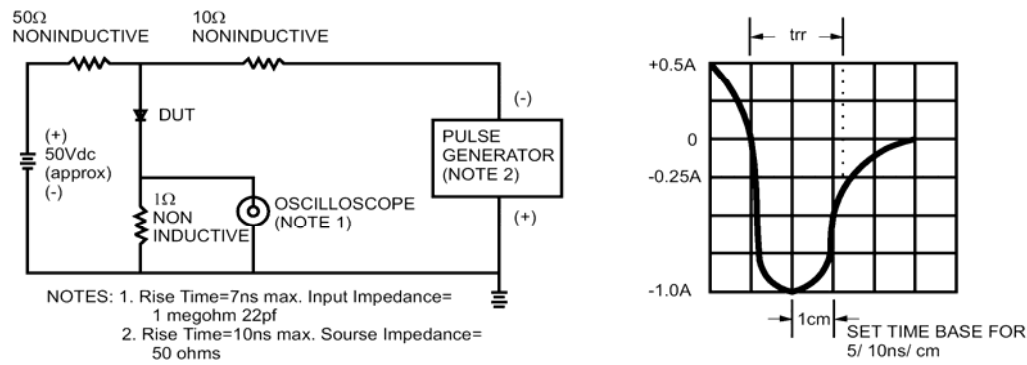


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

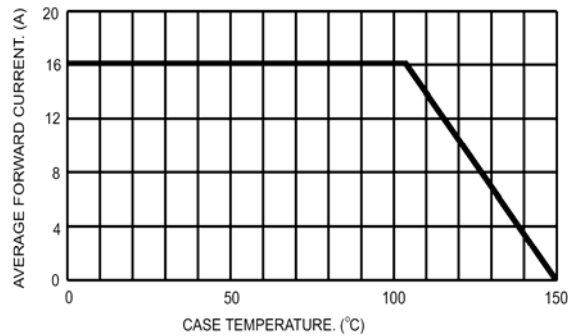


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

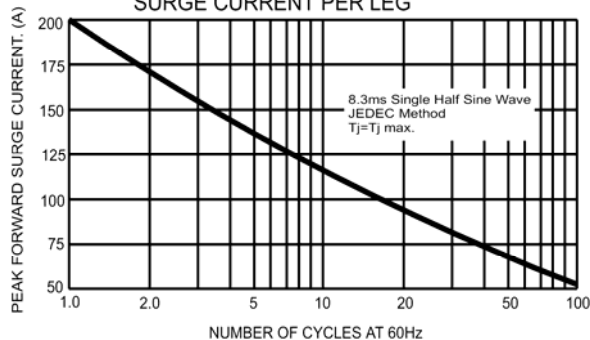


FIG.4- TYPICAL JUNCTION CAPACITANCE PER LEG

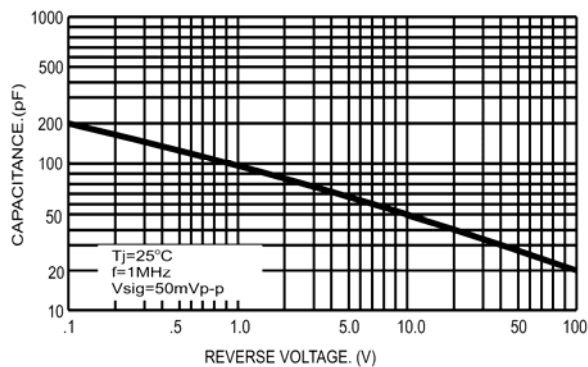


FIG.5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

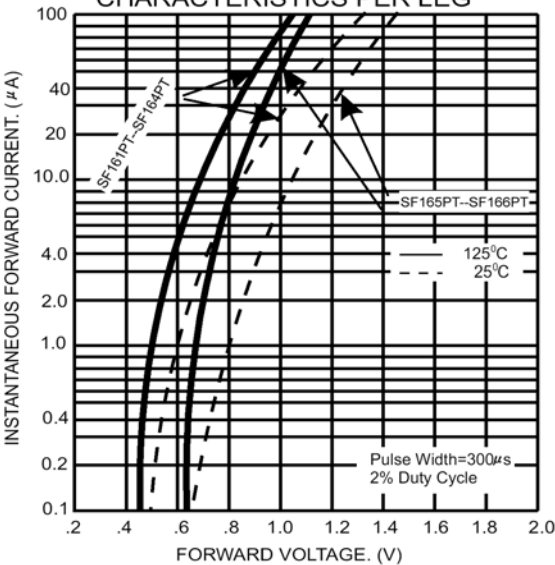


FIG.6- TYPICAL REVERSE CHARACTERISTICS

